



**Experience the
difference.**




**Stain
resistant**



**5 years
performance
warranty***



**For interior
use**

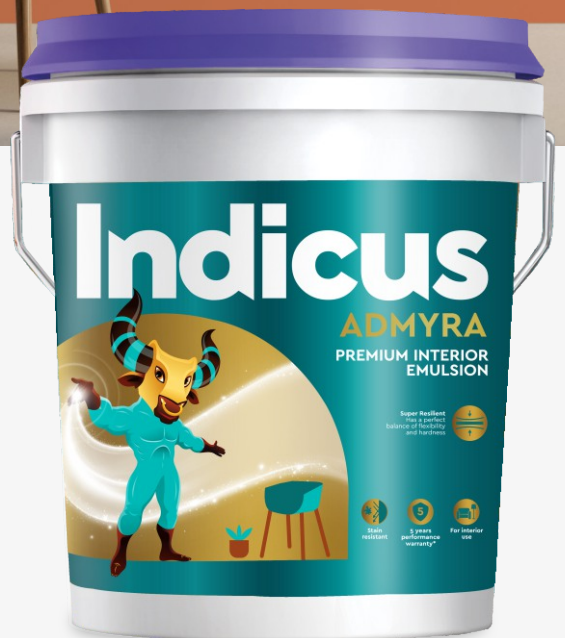

Admyra[®] is a super resilient paint that delivers a perfect balance of flexibility and hardness.

INDICUS ADMYRA is a water-based emulsion for interior walls that puts premium performance within reach. Its super resilient nature delivers a stain resistant film and rich colours that lasts.



Stain Resistant

Delays stains from penetrating the film delivering excellent cleanability.



Excellent Washability

Creates a washable surface that gives the ability to remove stains without damaging the film.



Unparalleled Colour Depth

Gives rich, smooth and uniform colours.



High Durability

Durable film that keeps the surface and colour as good as new for long time.



5 years performance warranty*

5 years performance warranty for film integrity, flaking and peeling.



Fungus & mildew resistant


Protects the wall against fungus and mildew growth.

Stain Resistant

STANDARD PAINT



ADMYRA



Excellent Washability

STANDARD PAINT




ADMYRA




Unparalleled Colour Depth

STANDARD PAINT



ADMYRA



Technical Properties

Finish	Rich matt
Bases	A-1, A-11, A-22
Vehicle Type	Acrylic
Specific Gravity	1.4 ± 0.02
Viscosity @ 27 °C	105 KU ± 5
VOC Level	<20 g/L
Drying Time ¹	Surface Dry : 30 to 40 mins. Recoat : 4 to 6 hours
Coverage ¹	256 sq.ft./L/coat
Dilution	Up to 50% with clean water

¹Drying time and coverage will vary depending upon the surface condition, degree of dilution and method of application.

Application Procedure

Surface Preparation

1. New masonry surfaces must be properly cured and sound in condition.
2. Ensure the surface is clean, dry and free from seepage, leakage, old paint, dirt, dust and any loose particles.
3. Any growth of fungus, algae or moss needs to be removed thoroughly with wire brush and water.
4. In case of dampness/waterproofing issues, repair the surface using GODRY Waterproofing Solutions.
5. Open non-structural cracks in V-groove and fill with INDICUS EASYSEAL.

Application

1. Prime the surface using INDICUS ULTRAPRIME as per the recommended application procedure.
2. Apply INDICUS ULTRACOAT Wall Putty as per the recommended method to smoothen and level the surface.
3. Apply another coat of INDICUS ULTRAPRIME and allow it to dry.

4. Apply 2-3 coats of ADMYRA after diluting it with clean water by up to 50%. A gap of 4 to 6 hours should be given between the coats.

Post Painting Care

- Prevent any damage to the paint film by sharp objects.
- For best performance of the paint, clean the surface of all algal and fungal growth, if any, at regular intervals of six months.

Precautions

- Diluted paint must be used within 24 hours of dilution.
- Do not over-thin or over-extend the brush.
- In coastal areas, it is recommended to apply the topcoat immediately after the undercoat is dry.
- Close container after each use and store in a cool and dry place.

Health & Safety

- No added Lead, Mercury, Chromium, Arsenic or other heavy metals.
- Allow adequate ventilation during application and drying.
- Do not breathe spray mist or sanding dust.
- Use rubber gloves, dust mask or nose pad during application, sanding and clean up.
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- Do not pour leftover paint/primer down the drain or in water courses.

Packaging

INDICUS ADMYRA is available in 1, 4, 10 & 20 Litre packaging.

Shelf Life & Storage

Shelf life is 36 months from the date of manufacturing, if stored in unopened and original packaging. Store in dry place away from direct sunlight.

* Conditions apply. Please refer INDICUS ADMYRA Warranty Guide for conditions and information on the warranty available at www.indicus.in/warranty.

Disclaimer: The product information and applications details given in this data sheet is meant to serve as a general guideline only. Users are advised to undertake a trial for product suitability prior to full-scale usage. There is no express or implied guaranty/warranty for the results. The company does not assume any liability or consequential damage for unsatisfactory results, arising from the use of our products.